
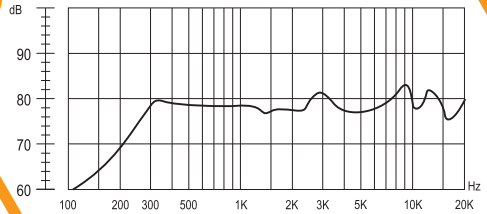


# HSP3040A-8

## Dimension

Unit: mm  
Tolerance : 0.3mm



## Frequency Response

Normalized to 1W Input Power and 1m Measuring Distance

● **Specification** (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz(dB)	Operating Temp. (°C)	Storage Temp. (°C)
8 ± 15%	1	2	450 ± 20%	450 ~ 12000	78 ± 3	-10 ~ +40	-10 ~ +40


**HSP3040A-8**

The specifications are only for 8Ω version. Specification for other impedance is available upon request.


★ Value normalized to 1W input power and 1m measuring distance.

## Dimension

Unit: mm  
Tolerance : 0.3mm



# HSP50B-8

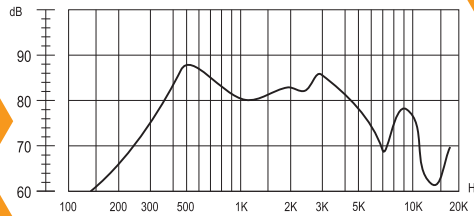

## Frequency Response

Normalized to 1W Input Power and 1m Measuring Distance



● **Specification** (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz(dB)	Operating Temp. (°C)	Storage Temp. (°C)
8 ± 15%	0.2	0.5	450 ± 20%	450 ~ 4000	84 ± 3	-10 ~ +40	-10 ~ +40

**HSP50B-8**



The specifications are only for 8Ω version. Specification for other impedance is available upon request.

★ Value normalized to 1W input power and 1m measuring distance.

## Dimension

Unit: mm  
Tolerance : 0.3mm

# HSP50E-8

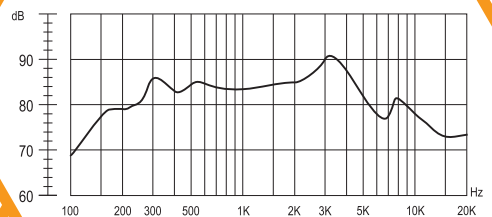

## Frequency Response

Normalized to 1W Input Power and 1m Measuring Distance

● **Specification** (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz(dB)	Operating Temp. (°C)	Storage Temp. (°C)
8 ± 15%	0.5	1	360 ± 20%	360 ~ 3400	83 ± 3	-10 ~ +40	-10 ~ +40

**HSP50E-8**

The specifications are only for 8Ω version. Specification for other impedance is available upon request.

★ Value normalized to 1W input power and 1m measuring distance.