


SILICON BRIDGE RECTIFIERS

VOLTAGE RANGE: 50 --- 1000 V
CURRENT: 25.0 A

FEATURES

- ◇ Ideal for printed circuit board
- ◇ Reliable low cost construction utilizing molded plastic technique
- ◇ Plastic material has U/L flammability classification 94V-0
- ◇ Mounting position: Any

GBU

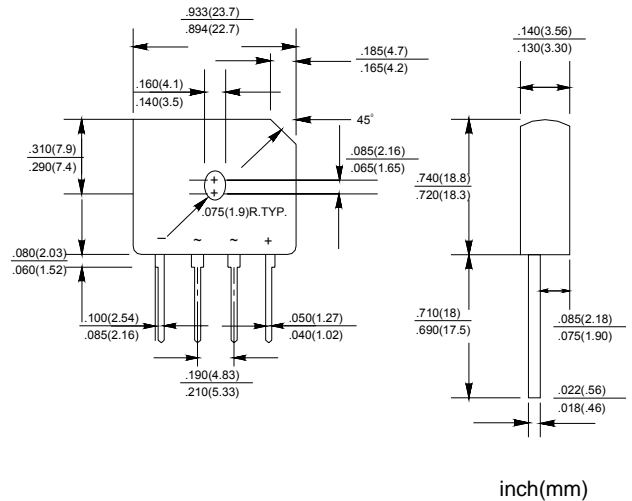

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

| | | GBU 25A | GBU 25B | GBU 25D | GBU 25G | GBU 25J | GBU 25K | GBU 25M | UNITS |
|--|------------------------------------|-----------------|------------|------------|------------|------------|------------|------------|---------------------------|
| Maximum recurrent peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum average forward $T_c=100^\circ\text{C}$ output current | $I_{F(AV)}$ | 25.0 | | | | | | | A |
| Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load | I_{FSM} | 240.0 | | | | | | | A |
| Maximum instantaneous forward voltage at 12.5 A | V_F | 1.0 | | | | | | | V |
| Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=125^\circ\text{C}$ | I_R | 5.0 500.0 | | | | | | | μA mA |
| Typical junction capacitance per leg (note 3) | C_J | 211 | | | | 94 | | | pF |
| Typical thermal resistance per leg (note 2) (note 1) | $R_{\theta JA}$ $R_{\theta JC}$ | 21.0 2.2 | | | | | | | $^\circ\text{C}/\text{W}$ |
| Operating junction temperature range | T_J | - 55 ---- + 150 | | | | | | | $^\circ\text{C}$ |
| Storage temperature range | T_{STG} | - 55 ---- + 150 | | | | | | | $^\circ\text{C}$ |

NOTE: 1. Unit case mounted on 3.2x3.2x0.12" thick (6.2x8.2x0.3cm) Al. Plate.

www.galaxycn.com

2. Units mounted in free air, no heat sink on P.C.B., 0.5x0.5"(12x12mm) copper pads, 0.375"(9.5mm) lead length.

3. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts.

FIG.1 – DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

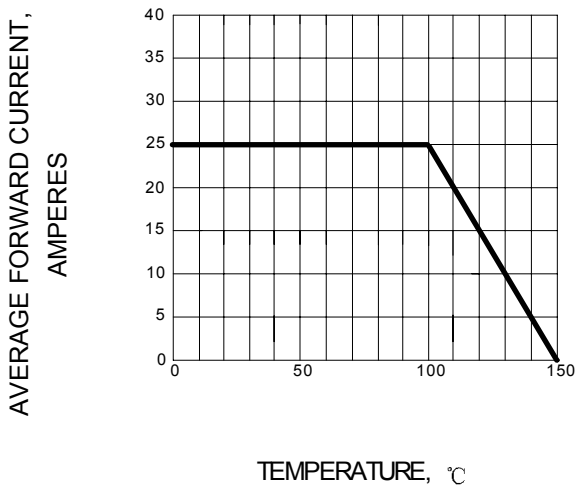


FIG.2 – TYPICAL FORWARD CHARACTERISTIC

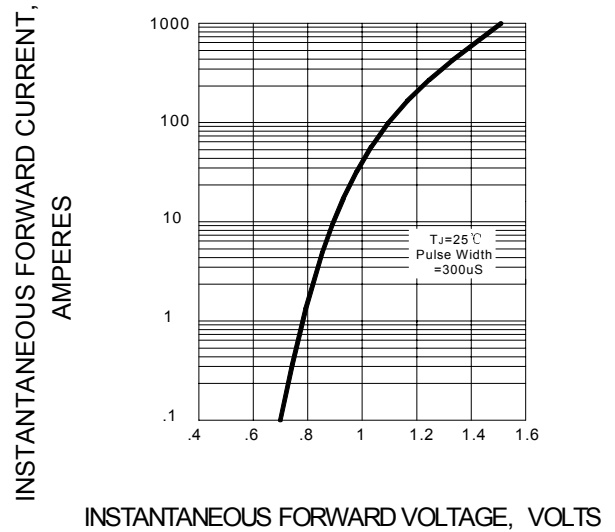


FIG.3 – MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

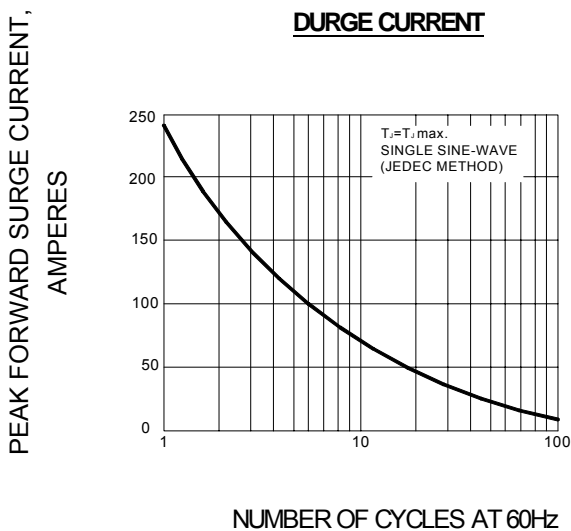


FIG.4 – TYPICAL REVERSE CHARACTERISTIC

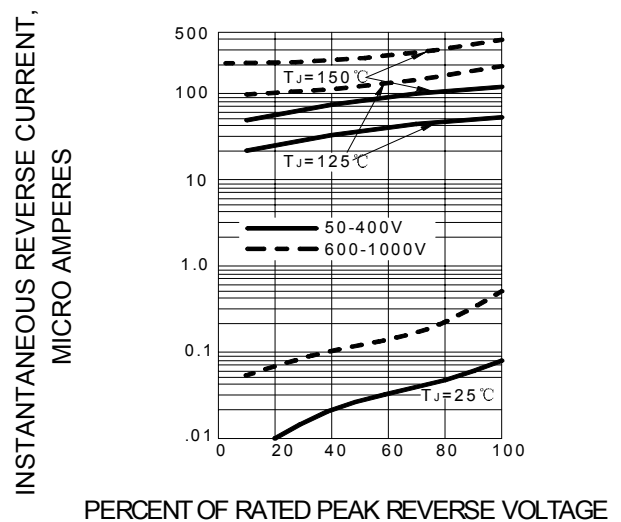


FIG.5 – TYPICAL JUNCTION CAPACITANCE PER LEG

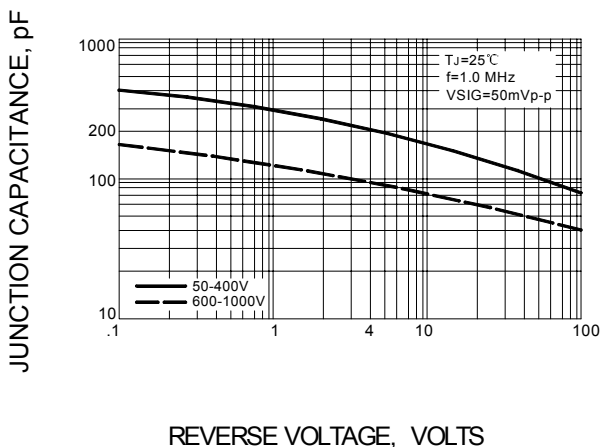


FIG.6 – TYPICAL TRANSIENT THERMAL IMPEDANCE

